


附煞車手搖絞線器 Gear Capping Hand Winch with Brake



加厚強力煞車棘爪，保障產品安全性
Thickened high strength brake jaw to ensure the safety

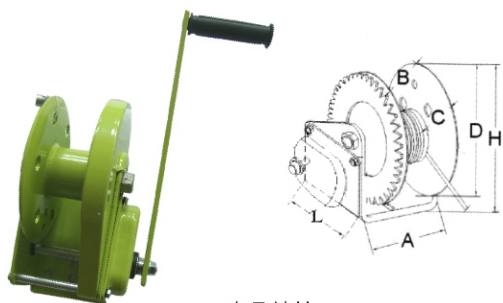

採用密閉裝置防塵防雨
Seal packing design for water-and-dusty-proof



高密度噴塗防止生鏽腐蝕
The surface is finished by high density powder coated for corrosion protection

產品特性：


- 使用於升降貨物，廣泛的應用於工業、園藝、遊艇等
 - 配件由優級碳鋼精緻而成
 - 自動煞車能固定在同一位置
- 手動式絞線器，不需電力操作

Features :

- It's widely used in lifting and lowering goods with multi-functions in industrial, gardening and yacht
- All fittings are made by high grade alloy steel
- Auto-brake keeps on the same position
- Hand winch can operate without electric power
- This product has received a lot of praise from our customers

產品編號 Item No.	安全荷重 W.L.L.		鋼索揚程 Steel Cable		尺寸(mm) Dimensions (mm)					淨重 N.W.	箱 / 台 Pack / Pcs
	磅 / LBS	毫米mm x米M	A	B	C	D	H	L	公斤 / kg		
CDL1200	1200	4mm x 35M	88	50	45	136	155	138	3.8	9	
CDL1800	1800	5mm x 50M	107	60	50	181	198	193	8.0	4	
CDL2600	2600	5mm x 50M	127	62	60	181	210	240	10.2	4	

手扳式絞車 Hand Winch

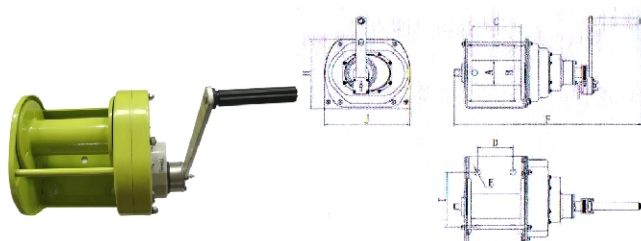

產品特性：

- 使用於升降貨物，廣泛的應用於工業、園藝、遊艇等
- 配件由優級碳鋼精緻而成
- 手動式絞線器，不需電力操作

Features :

- It's widely used in lifting and lowering goods with multi-functions in industrial, gardening and yacht.
- All fittings are made by high grade alloy steel.
- Hand winch can operate without electric power.

規格 Model	JC-500	JC-1000	JC-2000	JC-3000	
額定載荷 State Working Load / ton	0.5T	1T	2T	3T	
試驗載荷 Test Load kN	6.125	12.25	24.5	36.75	
適用鋼索尺寸 直徑(mm) x 長度(M) Adopted Wire Rope Dia x Length	Φ6.3*40	Φ8*40	Φ9*40	Φ12.5*40	
速比 Speed Ratio	4.33: 1	12.19:1	22.68:1	29.16:1	
連桿作用最大長度 mm The Max. Length of Link-pole Action	350	350	350	350	
最小扳手力 N Min. Force of Hand Tum	120	120	130	180	
主 要 尺 寸 (mm) Dimensions	A	Φ60	Φ76	Φ90	Φ100
	B	Φ140	Φ175	Φ190	Φ230
	C	150	154	195	205
	D	100	110	155	155
	E	Φ15	Φ18	Φ18	Φ18
	F	403	443	490	549
	H	182	214	230	296
	I	130	170	170	170
	J	245	266	300	365
	淨重 Net Weight 公斤 / kg	14.4	19.7	25.1	44.3